

MONITOUCH EXPRESS

Fe-Front runners

V8 Alte performance modelli compatti

Posizione orizzontale o verticale per soddisfare ogni esigenza !

V806




Piccolo ma potente !



V806MD MONO



V806TD 64K color

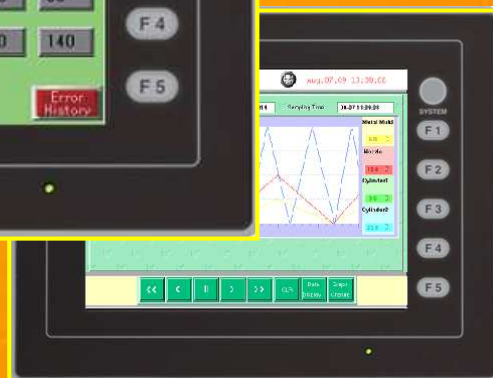

V806CD 64K color

- 👍 Altissime prestazioni
- 👍 64K colori o Monocromatico (16 toni di grigio)
- 👍 2 Ethernet (Modelli iM/iT/iC)
- 👍 2 porte USB (Master e Slave)
- 👍 2 porte seriali
- 👍 ... molto di più!

5.7 inches QVGA 4.5M FROM 512K SRAM 2ch serial COM I/F A·B USB DC power Analog Ether CF ap tion



MONITOUCH EXPRESS

V806 Specifiche Tecniche

Model	V806iTD	V806TD	V806iCD	V806CD	V806iMD	V806MD
Display size	5.7 inches					
Display device	TFT color LCD		STN color LCD		STN monochrome LCD	
Resolution	320x240 dots					
Display colors	65,536 colors(without blinks) 32,768 colors(with blinks)				16 grayscale (with blinks)	
Display memory	FROM (4.5MB)					
Backup memory	SRAM (512KB)	SRAM (128KB)	SRAM (512KB)	SRAM (128KB)	SRAM (512KB)	SRAM (128KB)
Ethernet	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *5	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *5	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *5
Communication I/F	Equipped					
CF card I/F	Equipped *2					
USB I/F	Type A and B(Ver1.1)					
Options	Communication unit					
	CU-00~08					
	I/O unit					
	V-I/O					
Serial interface	D-Sub 9-pin CN1 *2					
	RS-232C, RS-422/485, Asynchronous Data length: 7 bits, 8 bits, Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200bps					
	Modular 8-pin MJ1/MJ2					
	RS-232C • RS-422/485(2-wire) *3, Asynchronous Data length: 7 bits, 8 bits Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500bps *3					
Compatibility	CE Marking *3					
	EN61000-6-2, EN61000-6-4					
	UL/cUL *3					
	UL508, UL1604(Class1,Division2)					
	RoHS directive					
	Complied					

*2 Available only when equipped with DU-10 (option)
*3 Available only when connected with SIEMENS MPI (MJ2 only). Not compatible with D-Sub 9-pin (option)
*4 MJ2 is connectable with RS-422 (4-wire)
*5 Under development

V806 Dimensioni Esterne (mm) e Periferiche

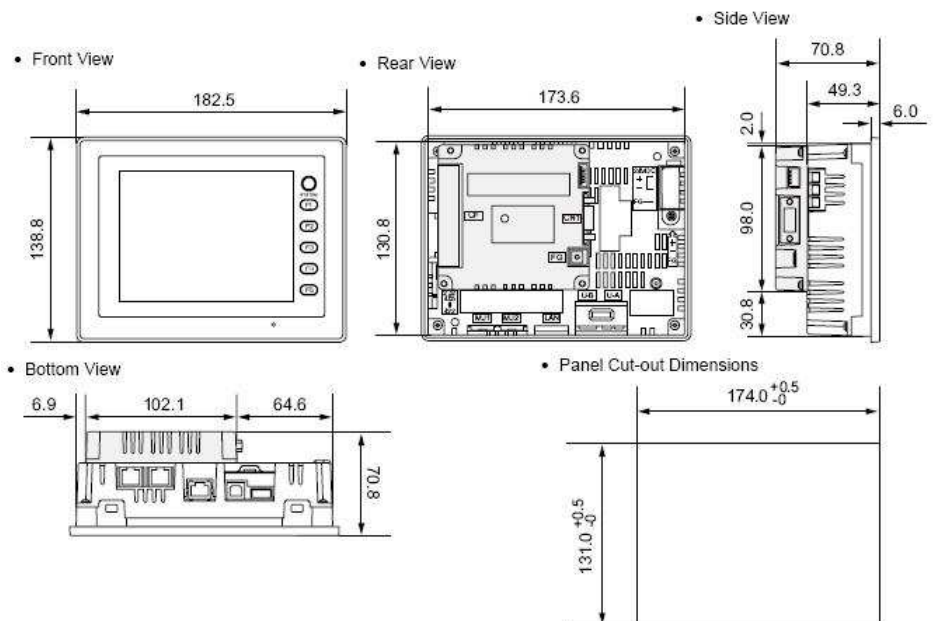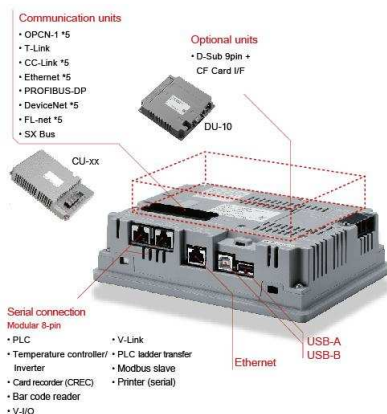

Hakko Electronics Co., Ltd.

Overseas Sales Department

890-1 Kamikashiwano-machi,
Hakusan, Ishikawa 924-0035, Japan

Tel +81-76-274-2144

Fax +81-76-274-5208

E-mail sales@hakko-elec.co.jp



EFA AUTOMAZIONE: Via S. Aleramo 2, 20063 Cernusco.S/N Mi Italy
T. +39 02.92113180 - F. +39 02.92113164 - info@efa.it